Installing PSP 1000 Front Casing

Tools used in this guide

- Phillips #00 Screwdriver (1)

This guide will show you how to remove the PSP's housing/frame.

© 2010 iFixit — CC BY-NC-SA

Step 1 - Battery

- Turn the PSP over so its back is facing you.

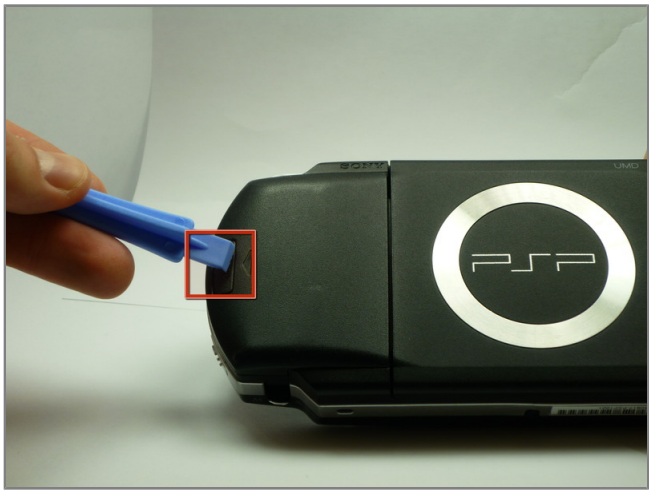

Step 2

- Locate the battery casing button on the rear-left side of the PSP.
- Press down the button and remove the battery cover.

Step 3

- Using your finger, remove the battery upwards from the system as shown.

Step 4 - Front Casing

- Remove the screws, with a phillips #00 screwdriver, shown.
- Be sure to sort the screws by their sizes and where they were located originally on the device so you can find them easily and put them back correctly during reassembly.

Step 5

- Remove the screw from the bottom side of the PSP. Keep it separated from the rest of the screws.

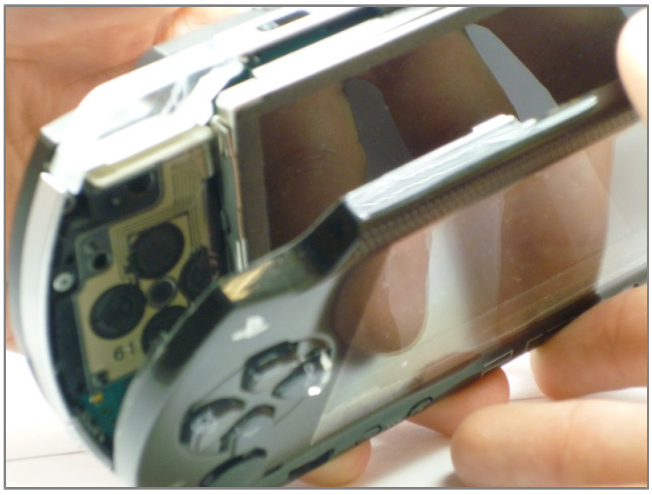

Step 6

- Gently separate the outer plastic casing from the rest of the system as shown.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on Dec 18, 2010.

© 2010 iFixit — CC BY-NC-SA